

pag. 3 **Foam Print**

pag. 4 **Foam Print Black**

pag. 5 **Foam Print Total Black**

pag. 6 **Foam Print with Black Core**

pag. 7 **Foam Print Special**

pag. 9 **Eco Foam**

pag. 11 **AD Print**

pag. 13 **Compositpan**

pag. 15 **Alu Print**



en. Composite Panel for indoor and outdoor application. It is composed by 2 layers of Expanded PVC 1mm thickness, density 0.55 kg/sqm and a core in Extruded Polystyrene density 30 kg/sqm. Both sides are protected by PE film.




it. Pannello composito per applicazioni indoor e outdoor, costruito con un'anima in Polistirene Estruso densità 30 kg/mc, racchiuso fra 2 lastre di PVC Semiespanso dello spessore di 1 mm, densità 0.55 kg/mc. Protetto ambo i lati da una pellicola in polietilene.



es. Panel compuesto para aplicaciones interiores y exteriores, construido con un alma en Poliestireno Extrudido densidad 30Kg/mc, encerrados entre 2 placas de PVC Medio Expandido con un espesor de 1 mm, densidad 0.55 kg/mc. Protegido ambos lados por una película transparente

Foam Print

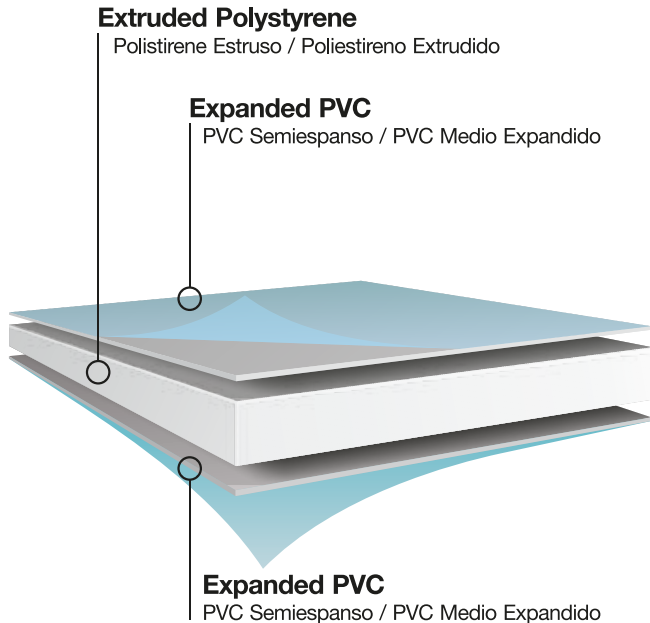

Utilization

Indoor
Outdoor

Customization

Flatbed
Film
Serigraphy

Applications

Stand
Showcase
Exhibitors
Posters
Furniture

Processing

Cutting
Milling

Utilizzo

Interno
Esterno

Stampa

Flatbed
Pellicola
Serigrafia

Applicazioni

Stand
Vetrine
Espositori
Cartellonistica
Arredamento

Lavorazioni

Taglio
Fresatura

Utilización

Interior
Exterior

Imprimir

Flatbed
Película
Serigrafía

Aplicaciones

Stand
Escaparate
Expositores
Vallas
Decoración

Tratamientos

Corte
Cerrillea

Standard Dimensions*

1560 x 3050 mm
2050 x 3050 mm
2050 x 4050 mm

Square Dimensions*

1560 x 3035 mm
2050 x 3035 mm
2050 x 4035 mm

Thickness*


10 mm
15 mm
19 mm
30 mm

Tolerance

Thickness: +/- 1 mm
Width: +/- 2 mm
Length: +/- 5 mm

***Non-standard sizes and thicknesses available to order.**

Foam Print Black

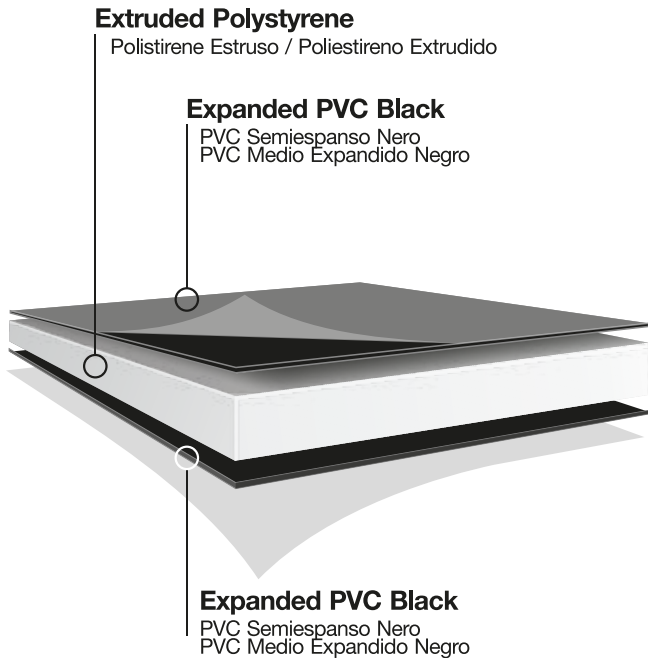

Utilization

Indoor
Outdoor

Customization

Flatbed
Film
Serigraphy

Applications

Stand
Showcase
Exhibitors
Posters
Furniture

Processing

Cutting
Milling

Utilizzo

Interno
Esterno

Stampa

Flatbed
Pellicola
Serigrafia

Applicazioni

Stand
Vetrine
Espositori
Cartellonistica
Arredamento

Lavorazioni

Taglio
Fresatura

Utilización

Interior
Exterior

Imprimir

Flatbed
Película
Serigrafía

Aplicaciones

Stand
Escaparate
Expositores
Vallas
Decoración

Tratamientos

Corte
Cerillea

Dimensions*

2050 x 3050 mm

Tickness*

10 mm
15 mm
19 mm

Tolerance

Tickness: +/- 1 mm
Width: +/- 2 mm
Length: +/- 5 mm

*Non-standard sizes and thicknesses available to order.

Foam Print Total Black



Extruded Polystyrene Black

Polistirene Estruso Nero / Poliestireno Extrudido Negro

Expanded PVC Black

PVC Semiespanso Nero
PVC Medio Expandido Negro



Expanded PVC Black

PVC Semiespanso Nero
PVC Medio Expandido Negro

Utilization

Indoor
Outdoor

Customization

Flatbed
Film
Serigraphy

Applications

Stand
Showcase
Exhibitors
Posters
Furniture

Processing

Cutting
Milling

Utilizzo

Interno
Esterno

Stampa

Flatbed
Pellicola
Serigrafia

Applicazioni

Stand
Vetrine
Espositori
Cartellonistica
Arredamento

Lavorazioni

Taglio
Fresatura

Utilización

Interior
Exterior

Imprimir

Flatbed
Película
Serigrafía

Aplicaciones

Stand
Escaparate
Expositores
Vallas
Decoración

Tratamientos

Corte
Cerillea

Dimensions*

2050 x 3050 mm

Tickness*


10 mm
15 mm
19 mm

Tolerance

Tickness: +/- 1 mm
Width: +/- 2 mm
Length: +/- 5 mm

*Non-standard sizes and thicknesses available to order.

Foam Print with Black Core

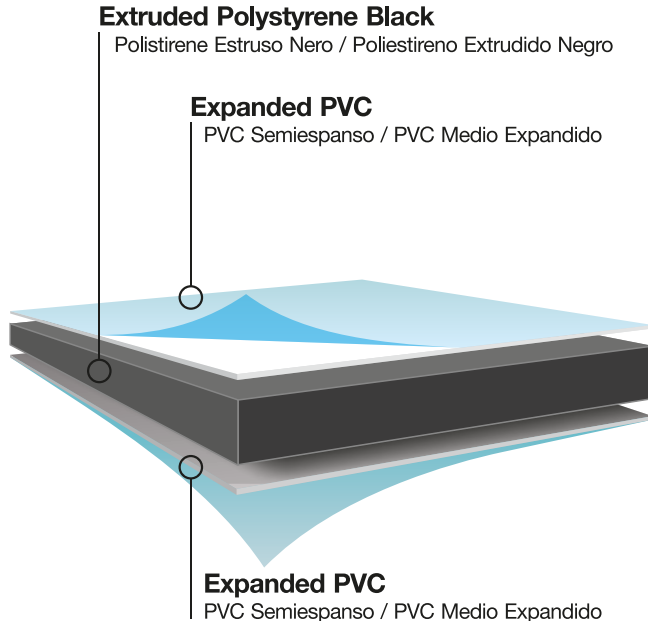

Utilization

Indoor
Outdoor

Customization

Flatbed
Film
Serigraphy

Applications

Stand
Showcase
Exhibitors
Posters
Furniture

Processing

Cutting
Milling

Utilizzo

Interno
Esterno

Stampa

Flatbed
Pellicola
Serigrafia

Applicazioni

Stand
Vetrine
Espositori
Cartellonistica
Arredamento

Lavorazioni

Taglio
Fresatura

Utilización

Interior
Exterior

Imprimir

Flatbed
Película
Serigrafía

Aplicaciones

Stand
Escaparate
Expositores
Vallas
Decoración

Tratamientos

Corte
Cerillea

Dimensions*

1560 x 3050 mm
2050 x 3050 mm
2050 x 4050 mm

Tickness*


10 mm
15 mm
19 mm

Tolerance

Tickness: +/- 1 mm
Width: +/- 2 mm
Length: +/- 5 mm

***Non-standard sizes and thicknesses available to order.**

Foam Print Special

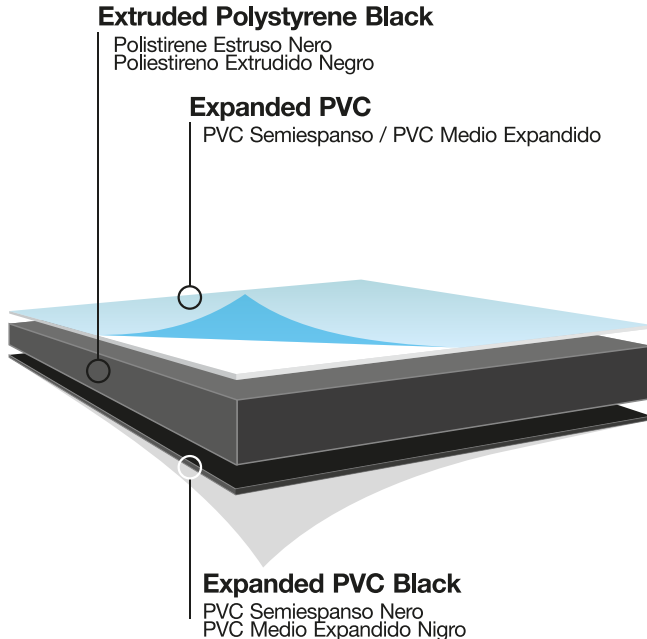

Utilization

Indoor
Outdoor

Customization

Flatbed
Film
Serigraphy

Applications

Stand
Showcase
Exhibitors
Posters
Furniture

Processing

Cutting
Milling

Utilizzo

Interno
Esterno

Stampa

Flatbed
Pellicola
Serigrafia

Applicazioni

Stand
Vetrine
Espositori
Cartellonistica
Arredamento

Lavorazioni

Taglio
Fresatura

Utilización

Interior
Exterior

Imprimir

Flatbed
Película
Serigrafía

Aplicaciones

Stand
Escaparate
Expositores
Vallas
Decoración

Tratamientos

Corte
Cerillea

Dimensions*

2050 x 3050 mm

Tickness*

10 mm
15 mm
19 mm

Tolerance

Tickness: +/- 1 mm
Width: +/- 2 mm
Length: +/- 5 mm

*Non-standard sizes and thicknesses available to order.



en. Composite panel for indoor applications, built with a Extruded Polystyrene core density 30Kg/mc white, encased between 1 Expanded PVC sheet with thickness of 1 mm, density 0.55 kg/mc and 1 Whiteback paper layer




it. Pannello composito per applicazioni indoor, costruito con un'anima in Polistirene Estruso densità 30 kg\mc di colore bianco, racchiuso fra 1 lastra di PVC Semiespanso dello spessore di 1 mm, densità 0.55 kg/mc, ed 1 strato di carta Whiteback



es. Panel compuesto para aplicaciones interiores, construido con un alma en Poliéstireno Extrudido densidad 30Kg/mc de color blanco, encerrados entre 1 lámina de PVC Medio Expandido de un espesor de 1 mm, densidad 0.55 kg/mc y 1 capa de papel Whiteback

Eco Foam

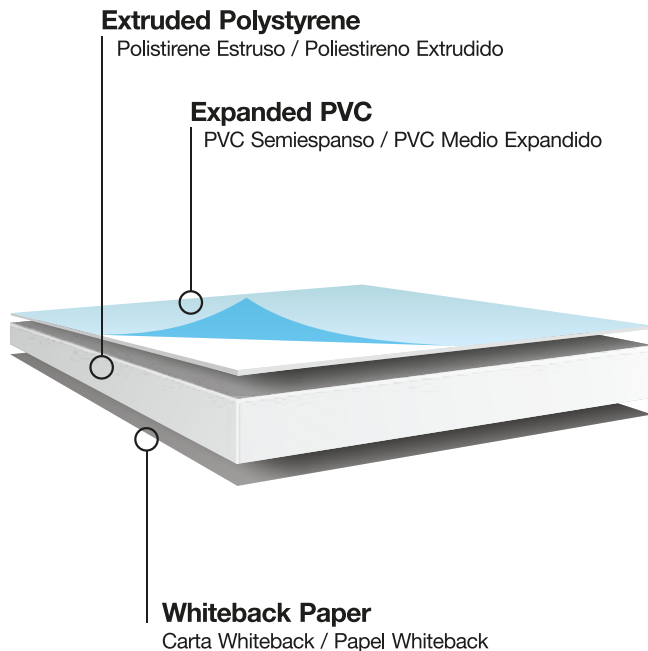

Utilization
Indoor

Applications
Stand

Processing
Cutting

Customization
Flatbed

Showcase
Exhibitors

Milling

Film
Serigraphy

Posters
Furniture

Utilizzo
Interno

Applicazioni
Stand

Lavorazioni
Taglio

Stampa
Flatbed

Vetrine
Espositori

Fresatura

Pellicola
Serigrafia

Cartellonistica
Arredamento

Utilización
Interior

Aplicaciones
Stand

Tratamientos
Corte

Imprimir
Flatbed

Escaparate
Expositores

Cerillea

Película
Serigrafía

Vallas
Decoración

Dimensions*

2050 x 3050 mm

Thickness*

10 mm
15 mm
19 mm

Tolerance

Thickness: +/- 1 mm
Width: +/- 2 mm
Length: +/- 5 mm

***Non-standard sizes and thicknesses available to order.**



en. Composite panel for indoor applications (for example retraining of interiors), which was constructed with Extruded Polystyrene core with density 30 kg/mc white encased between 1 Expanded PVC sheet with thickness of 1 mm, density 0.55 kg/mc, and 1 layer of double-sided tape surfaced, protected by paper Liner




it. Pannello composito per applicazioni indoor (ad esempio riqualificazione di interni), costruito con un'anima in polistirene estruso densità 30 kg\mc di colore bianco, racchiuso fra 1 lastra di PVC Semiespanso dello spessore di 1 mm, densità 0.55 kg/mc, ed 1 strato di Biadesivo Retinato, protetto da Liner di carta.



es. Panel compuesto para aplicaciones interiores (por ejemplo recalificación de interiores), construido con un alma de Poliéstireno Extrudido con una densidad 30 kg/mc de color blanco encerrados entre 1 lámina de PVC Medio Expandido de un espesor de 1 mm, densidad 0.55 kg/mc, y 1 capa de Adhesivo con Cable, protegido por Liner de papel

AD Print

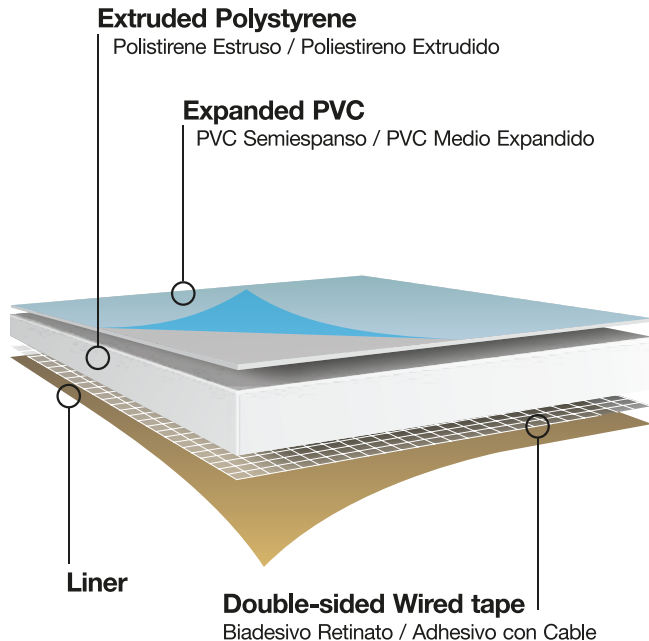

Utilization
Indoor

Applications
Stand

Processing
Cutting

Customization
Flatbed

Exhibitors
Posters

Milling

Film
Serigraphy

Furniture

Utilizzo
Interno

Applicazioni
Stand

Lavorazioni
Taglio

Stampa
Flatbed

Vetrine
Espositori

Fresatura

Pellicola
Serigrafia

Cartellonistica
Arredamento

Utilización
Interior

Aplicaciones
Stand

Tratamientos
Corte

Imprimir
Flatbed

Escaparate
Expositores

Cerillea

Película
Serigrafía

Vallas
Decoración

Dimensions*

2050 x 3050 mm

Thickness*

10 mm
15 mm
19 mm

Tolerance

Thickness: +/- 1 mm
Width: +/- 2 mm
Length: +/- 5 mm

*Non-standard sizes and thicknesses available to order.



en. Composite pannel for indoor and outdoor applications made by 2 Composit layers 2 mm, varnished RAL9010 (white) with a Expanded Polystyrene core KPA150




it. Pannello composito per applicazioni indoor e outdoor costruito con 2 lastre di Composit da 2 mm, verniciate RAL9010 (bianco) ed un'anima in Polistirene Espanso KPA150.



es. Panel compuesto para aplicaciones interiores y exteriores, con dos placas de Composit de 2 mm, barnizadas RAL9010 (blanco) y con un alma de Poliéstireno Expandido KPA150

Compositpan

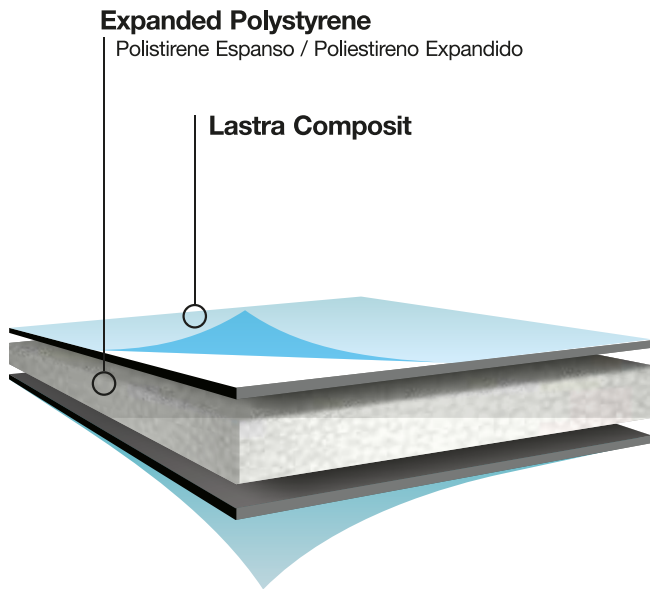

Expanded Polystyrene

Polistirene Espanso / Poliestireno Expandido

Lastra Composit

Dimensions*

1220 x 2200 mm
1220 x 3000 mm

Tickness*

10 mm
20 mm
30 mm

Tolerance

Tickness: +/- 1 mm
Width: +/- 2 mm
Length: +/- 5 mm

Utilization

Indoor
Outdoor
Customization
Flatbed
Film
Serigraphy

Applications

Stand
Showcase
Exhibitors
Posters
Furniture

Processing

Cutting
Milling

Utilizzo

Interno
Esterno
Stampa
Flatbed
Pellicola
Serigrafia

Applicazioni

Stand
Vetrine
Espositori
Cartellonistica
Arredamento

Lavorazioni

Taglio
Fresatura

Utilización

Interior
Exterior
Imprimir
Flatbed
Película
Serigrafía

Aplicaciones

Stand
Escaparate
Expositores
Vallas
Decoración

Tratamientos

Corte
Cerillea

***Non-standard sizes and thicknesses available to order.**



en. Composite panel for indoor and outdoor applications made by 2 Aluminium layers 0.3 mm, varnished RAL9010 (white) with a Expanded Polystyrene core KPA150



it. Pannello composito per applicazioni indoor e outdoor costruito con 2 Lamine di Alluminio da 0,3 mm, verniciate RAL9010 (bianco) ed un'anima in Polistirene Espanso KPA150.



es. Panel compuesto para aplicaciones interiores y exteriores, con dos láminas de aluminio de 0.3 mm, barnizadas RAL9010 (blanco) y con un alma de Poliéstireno Expandido KPA150


Alu Print

Extruded Polystyrene

Polistirene Estruso / Poliestireno Extrudido

Lamina of Aluminium RAL9010

Lamina di Alluminio RAL9010
Lámina de Aluminio RAL9010

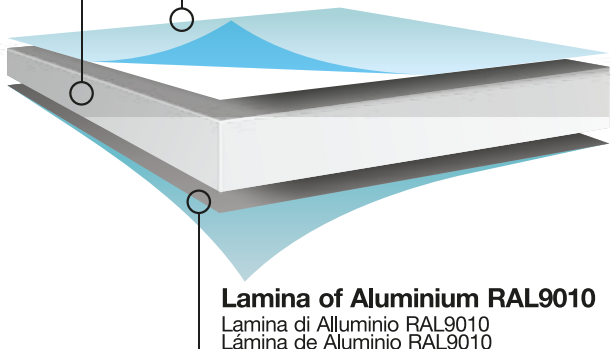

Lamina of Aluminium RAL9010

Lamina di Alluminio RAL9010
Lámina de Aluminio RAL9010

Dimensions*

1200 x 3000 mm
1200 x 2200 mm
1000 x 3000 mm
1000 x 2200 mm

Tickness*

7 mm
10 mm
15 mm
19 mm

Tolerance

Tickness: +/- 1 mm
Width: +/- 2 mm
Length: +/- 5 mm

Utilization

Indoor
Outdoor
Customization
Flatbed
Film
Serigraphy

Applications

Stand
Showcase
Exhibitors
Posters
Furniture

Processing

Cutting
Milling

Utilizzo

Interno
Esterno
Stampa
Flatbed
Pellicola
Serigrafia

Applicazioni

Stand
Vetrine
Espositori
Cartellonistica
Arredamento

Lavorazioni

Taglio
Fresatura

Utilización

Interior
Exterior
Imprimir
Flatbed
Película
Serigrafía

Aplicaciones

Stand
Escaparate
Expositores
Vallas
Decoración


Tratamientos

Corte
Cerillea

*Non-standard sizes and thicknesses available to order.



Download catalogo

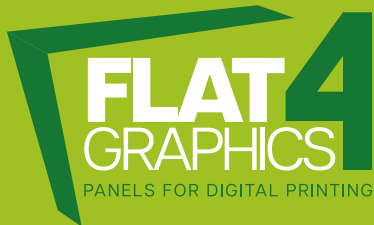

SORRENTINO s.r.l.

**SEDE LEGALE
E PRODUTTIVA**

Via P.I.P. Industriale, 12 - Lotto 4
83020 DOMICELLA (AV)
Tel. 081 8254200 - Fax 081 8254306
E-mail: info@sorrentinopannelli.com

**UNITÀ
PRODUTTIVA**

Via Palazzon, 2
35010 CAMPODORO (PD)
Tel. 049 9065946 - Fax 049 9069102
E-mail: campodoro@sorrentinopannelli.com

www.sorrentinopannelli.com

